


## 40C12 - Daily Van

### DATA SHEET

#### Main Features

<b>GVW (kg):</b>	<b>4200</b>
<b>GTW (kg):</b>	<b>7200</b>
<b>Wheelbases (mm):</b>	<b>3300 3950</b>
<b>Capacities (m3):</b>	<b>12.0 13.2 15.6 17.2</b>

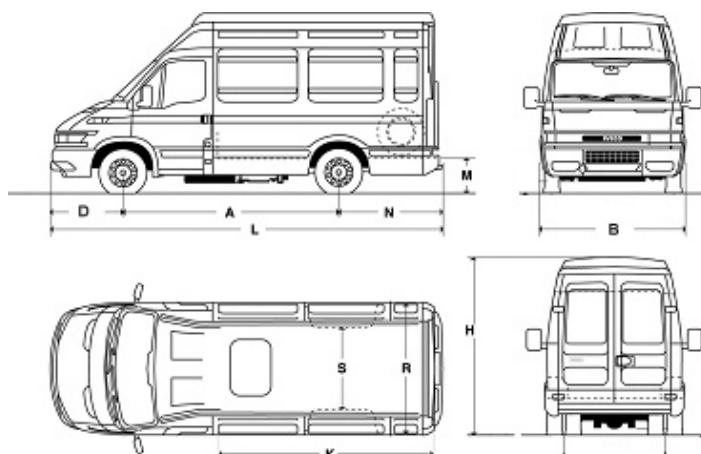

#### Favoured Options:

Air conditioning  
Alarm system to cab and load area  
Driver's only or driver's and double passenger  
airbags with seat belt pretensioners  
Electric windows  
Headlamp washers  
PVC trim  
Heavy duty alternator  
Heated, adjustable exterior mirrors  
Central locking with remote  
Rear tow bar with ball  
Satellite navigation  
Front centre passenger 3 point inertia reel  
seat belt  
AGile automated 6-spd gearbox  
Road speed limiter (90km/hr)  
13 pin towing electric socket

#### Dimensions (mm)

		<b>3300</b>	<b>3300</b>	<b>3950</b>	<b>3950</b>
<b>A</b>	<b>Wheelbase</b>				
	<b>Roof</b>	<b>HR</b>	<b>XHR</b>	<b>HR</b>	<b>XHR</b>
<b>B</b>	Overall Width	1996	1996	1996	1996
<b>L</b>	Overall Length	5997	5997	7012	7012
<b>H</b>	Overall Height (unladen)	2725	2915	2720	2905
<b>D</b>	Front Overhang	998	998	998	998
<b>N</b>	Rear Overhang	1699	1699	2064	2064
	Turning Circle: (k to k)	11980	11980	14020	14020
	Turning Circle: (w to w)	13100	13100	15140	15140

#### Cargo Area

<b>K</b>	Internal Length	3520	3520	4560	4560
<b>R</b>	Internal Width	1800	1800	1800	1800
	Internal Height	1900	2100	1900	2100
<b>M</b>	Height of Load Floor	750	750	750	750

<b>S</b>	Wheel House Distance (internal)	1030	1030	1030	1030
----------	---------------------------------	------	------	------	------

#### Rear Door

Opening Width	1540	1540	1540	1540
Opening Height	1780	1990	1780	1990
Opening Angle (deg)	270	270	270	270

#### Side Door

Opening Width	1250	1250	1250	1250
Opening Height	1780	1780	1780	1780

<b>Capacity (m3)</b>	12.0	13.2	15.6	17.2
----------------------	------	------	------	------

#### Weights (kg): Kerb weights given are with full fuel, oil, water and include driver @ 75kg, spare wheel and tools.

GVW	4200	4200	4200	4200
GTW	7200	7200	7200	7200
Front Axle Capacity	1900	1900	1900	1900
Rear Axle Capacity	3100	3100	3100	3100
Kerb Weight Front Axle	1325	1325	1360	1365
Kerb Weight Rear Axle	1030	1065	1115	1155
Kerb Weight Total	2355	2390	2475	2520
Maximum Payload	1845	1810	1725	1680

For more options please contact your local distributor



#### Iveco Ltd

Iveco House, Station Road, Watford,  
Herts WD17 1SR  
Telephone: (01923) 246400  
Fax: (01923) 259598  
Email: cvbu@iveco.com  
Website: www.iveco.com

The company reserves the right to amend such changes to this specification as it thinks appropriate in pursuance of its policy of continuing development. This issue supersedes all previous issues.

Weights are subject to a manufacturing tolerance of 5%.

## 40C12 - Daily Van

Tel: 01952 684433 Fax: 01952 683502

### Engine

Fuel	Diesel
Cylinders	4 (16 valves)
Bore (mm)	88
Stroke (mm)	94
Capacity (litres)	2.287
Power (hp/kW)	116 / 85
@ rpm	3100-3900
Torque (Nm/lbft)	270 / 199
@ rpm	1800-3000
Emission Compliance	Euro 3
Cooling Fan	Electro-magnetic
Fuel System	Common Rail - HPI
Immobiliser	Standard
Exhaust System	Side emit - RHS

### Gearbox

Type	S 5-200
	5 speed synchromesh overdrive top

### Performance (with standard tyres and axle ratios)

Gear	1st	5th
Gear Ratio	5.00	0.78
Max Geared Speed (mph)	15	94
Gradeability @ GVW (%)	39	6

### Clutch

Type	Hydraulic
External Diameter	235mm (9.25")
Total Contact Surface	439cm <sup>2</sup>

### Electrics

Alternator - Std	14V - 120A
Alternator - Opt	14V - 140A
Starter	12V, 2.2kW
Battery	12V - 110Ah

### Front Suspension

Independent with torsion bars

### Rear Suspension

Parabolic leaf spring (Opt: multi-leaf)

Anti-roll bars Front and rear

Shock Absorbers Front and rear

### Brakes

Disc brakes, dual circuit, vacuum servo

	Front	Rear
Dia (mm) / Brake area cm <sup>2</sup>	290 / 276	290 / 276
Parking brake	On rear wheels	

ABS+EBD+ABD Standard

Power Steering Standard

### Wheels and Tyres

Wheels	5JK 16H (twin rear)
Tyre(s)	195/75R16
Spare	Standard. Located behind left wheel arch in rear
Power Take Off	Facility for side mounted PTO
Maximum Output	175Nm

### Rear Axle

Ratio(s)	Std	Opt
	4.18	4.44

### Fuel Tank

70 litre with locking fuel cap

### Frame

Wheelbase (mm)	3300	3950
No. of Cross Members	6	7
Member Height (mm)	180	180
Member Width (mm)	69	69
Member Thickness (mm)	3	3

### STANDARD SPECIFICATION

#### Cabin

3 person semi forward cab  
Large storage pockets in doors  
Glove compartment with lock  
Dual passenger seat with headrests  
Sun visors  
Laminated windscreen  
Single piece synthetic floor mat  
3 point inertia reel belt on outer seats. Centre lap belt on middle seat

Fully adjustable driver's seat with headrest  
Central light and courtesy spot light  
Exterior mirrors with integrated wide angle  
Support handle for passenger  
Illuminated ashtray with cigarette lighter

#### Dashboard incorporates:

Electronic rev counter  
Engine coolant temperature indicator with high temperature indicator light  
Analogue electronic tachograph  
Fuel level indicator with reserve light indicator

#### Digital display incorporates:

Clock  
RDS stereo radio/cassette player  
Odometer  
External thermometer - Option with air conditioning  
Instrument light dimmer switch

#### Indicator lights:

Low level power steering oil  
Engine pre-heating  
Low engine oil pressure and level  
Low battery charge  
Parking and driving headlights  
High beam headlights  
Hazard lights  
(Each engine start initiates a check of the indicator lights)  
Engaged parking brake indicator  
Low engine coolant level  
Clogged air filter  
Presence of water/clog in fuel filter  
Rear fog lights  
Direction indicator lights  
Low brake oil level, circuit failure or wear

#### Indicator lights - preset:

Trailer direction indicator lights  
Engaged ABD  
ABS / EBD braking system failure  
Airbag failure  
PTO engaged

#### Lighting and Signals

Asymmetrical headlights, driving/high beam  
Front and rear parking lights  
Rear fog lights  
Hazard lights  
Side marker lights (3950mm w/b only)  
Rear licence plate illuminator lights  
Reverse lights  
Front, side and rear direction indicators  
Rear braking indicators

#### Windshield Wipers

Two wiper arms with two speed motor and intermittent wipe.  
Windshield washer with sprayer located on windshield wipers.

#### Heating and Ventilation

Four speed electric fan with 5 different air distribution modes and cab recirculation.  
Windshield and side window defroster and defogger through side and front air vents.  
Fresh air ventilation when heater turned off.

#### Construction and Finish

C-section steel longitudinal side members with tapered ends and tubular crossmembers  
Pressed steel unitary construction body on rubber bushes. Anti-corrosion protection includes full cathodic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

#### Security

Immobiliser and steering lock; Full unglazed steel bulkhead; Unglazed rear doors;

#### Load Area

Floor: steel ribbed with load lashing rings.  
Sides: reinforced sides with load lashing rings.  
Side access via dual stop side loading door with internal step and grab handle.  
Rear access doors with stops at 90 deg. and 270 deg.  
Interior lights at side and rear (door operated with individual isolation).